CR17505 Cylindrical Lithium Battery Specification

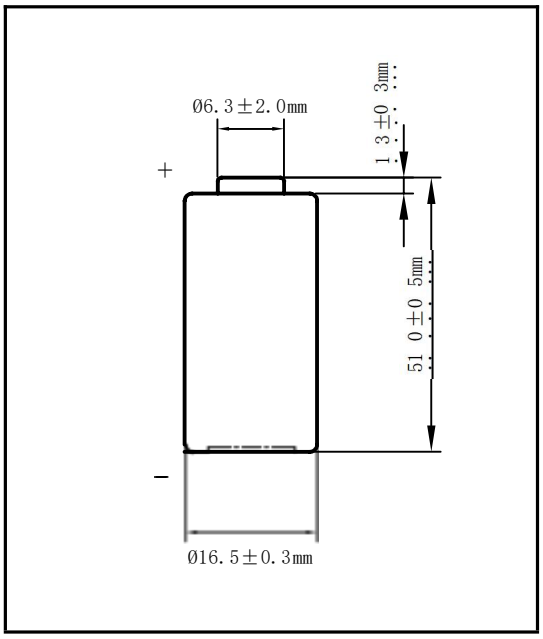

Nominal voltage		3.0V
Maximum size	Calibre	16.8mm
	High degree	51.5mm
Reference weight		24.8g
Average rated capacity		2800mAh
Standard discharge current		1mA
Termination Voltage		2.0V
Maximum continuous discharge current		1000mA
Maximum pulse discharge current		3000mA
Operating temperature		-40~ +70*C

Constant Current Discharge Curve

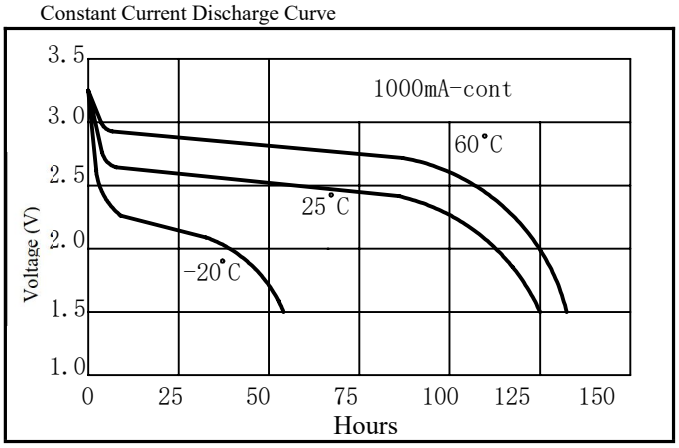

Constant Current Discharge Curve

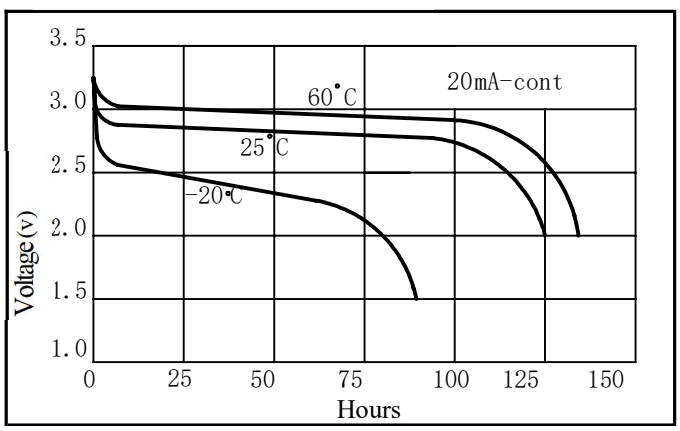

Pulse Discharge Curve

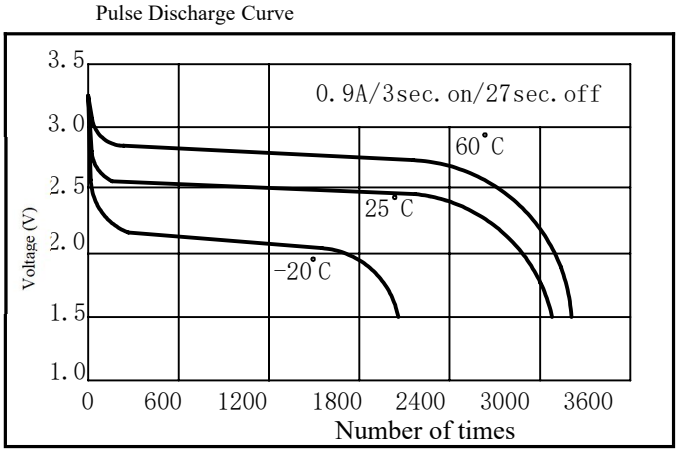

Constant Current Discharge Curve

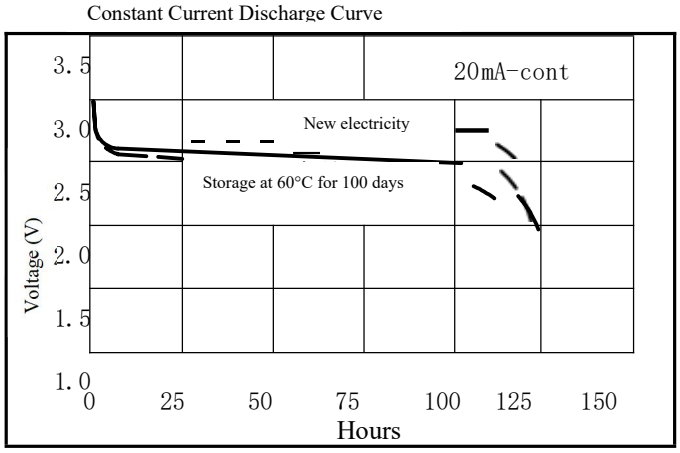

*If the operating temperature of the battery exceeds the range of -20 C ~ +60C, please consult VTC Power CO.,LTD.

Warning Signs.

- Do not charge, disassemble, heat above 100°C, or incinerate.
- Do not mix batteries.
- Do not short-circuit the battery.

The above information is for informational purposes only and does not involve warranty or guarantee of battery products. Battery design and specifications are subject to change without notice. For the latest information, please contact VTC Power CO.LTD